




# QUICK RELEASE BALL LOCK PINS

## Ring Handle

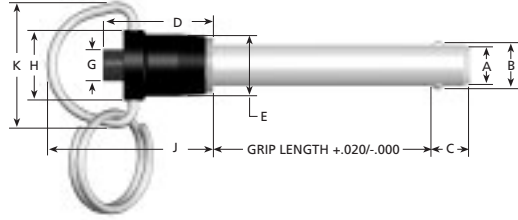

Dia	Hole Size		Approx. Pull-Out Strength (lbs)	Calculated Double Shear (lbs)		
	Max	Min		4130 Steel	17-4 Stainless	304 Stainless
3/16	.1940	.1900	200	4,600	5,150	—
1/4	.2540	.2500	230	8,200	9,200	2,200
5/16	.3165	.3125	510	12,800	14,400	3,500
3/8	.3790	.3750	575	18,400	20,600	4,500
1/2	.5050	.5000	1,160	32,800	36,800	11,500

These positive locking quick release pins have a wide range of applications in fastening, locating, and alignment applications. The pins will not release until the button on the handle is depressed. Once the button is depressed, the balls retract into the shank allowing the pin to be inserted or removed into or out of a hole. They are available in three shank materials to meet your application. The handles for the pins listed below are made from 2024-T4 aluminum and anodized black. Stainless handles are available as specials. The pins are supplied with a stainless steel split ring for attaching a cable assembly. Pins in other grip lengths are available as special orders.

4130 Steel Part #	17-4 SS Part #	304 SS Part #	Nominal Diameter	A Max	A Min	Grip Length	+/- .005 B	+ .000/- .030 C	D	E	G	H	J	K
RAAS-18-050	RACH-18-050	—	3/16	.1885	.1870	.50	.220	.260	.91	.47	.23	.59	1.45	1.16
RAAS-18-075	RACH-18-075	—	3/16	.1885	.1870	.75	.220	.260	.91	.47	.23	.59	1.45	1.16
RAAS-18-100	RACH-18-100	—	3/16	.1885	.1870	1.00	.220	.260	.91	.47	.23	.59	1.45	1.16
RAAS-18-125	RACH-18-125	—	3/16	.1885	.1870	1.25	.220	.260	.91	.47	.23	.59	1.45	1.16
RAAS-18-150	RACH-18-150	—	3/16	.1885	.1870	1.50	.220	.260	.91	.47	.23	.59	1.45	1.16
RAAS-18-175	RACH-18-175	—	3/16	.1885	.1870	1.75	.220	.260	.91	.47	.23	.59	1.45	1.16
RAAS-18-200	RACH-18-200	—	3/16	.1885	.1870	2.00	.220	.260	.91	.47	.23	.59	1.45	1.16
RAAS-18-250	RACH-18-250	—	3/16	.1885	.1870	2.50	.220	.260	.91	.47	.23	.59	1.45	1.16
RAAS-18-300	RACH-18-300	—	3/16	.1885	.1870	3.00	.220	.260	.91	.47	.23	.59	1.45	1.16
RAAS-18-350	RACH-18-350	—	3/16	.1885	.1870	3.50	.220	.260	.91	.47	.23	.59	1.45	1.16
RAAS-18-400	RACH-18-400	—	3/16	.1885	.1870	4.00	.220	.260	.91	.47	.23	.59	1.45	1.16
RAAS-25-050	RACH-25-050	RACS-25-050	1/4	.2485	.2470	.50	.289	.290	.91	.47	.23	.59	1.45	1.16
RAAS-25-075	RACH-25-075	RACS-25-075	1/4	.2485	.2470	.75	.289	.290	.91	.47	.23	.59	1.45	1.16
RAAS-25-100	RACH-25-100	RACS-25-100	1/4	.2485	.2470	1.00	.289	.290	.91	.47	.23	.59	1.45	1.16
RAAS-25-125	RACH-25-125	RACS-25-125	1/4	.2485	.2470	1.25	.289	.290	.91	.47	.23	.59	1.45	1.16
RAAS-25-150	RACH-25-150	RACS-25-150	1/4	.2485	.2470	1.50	.289	.290	.91	.47	.23	.59	1.45	1.16
RAAS-25-175	RACH-25-175	RACS-25-175	1/4	.2485	.2470	1.75	.289	.290	.91	.47	.23	.59	1.45	1.16
RAAS-25-200	RACH-25-200	RACS-25-200	1/4	.2485	.2470	2.00	.289	.290	.91	.47	.23	.59	1.45	1.16
RAAS-25-250	RACH-25-250	RACS-25-250	1/4	.2485	.2470	2.50	.289	.290	.91	.47	.23	.59	1.45	1.16
RAAS-25-300	RACH-25-300	RACS-25-300	1/4	.2485	.2470	3.00	.289	.290	.91	.47	.23	.59	1.45	1.16
RAAS-25-350	RACH-25-350	RACS-25-350	1/4	.2485	.2470	3.50	.289	.290	.91	.47	.23	.59	1.45	1.16
RAAS-25-400	RACH-25-400	RACS-25-400	1/4	.2485	.2470	4.00	.289	.290	.91	.47	.23	.59	1.45	1.16
RAAS-31-050	RACH-31-050	RACS-31-050	5/16	.3110	.3095	.50	.375	.330	.91	.47	.23	.59	1.45	1.16
RAAS-31-075	RACH-31-075	RACS-31-075	5/16	.3110	.3095	.75	.375	.330	.91	.47	.23	.59	1.45	1.16
RAAS-31-100	RACH-31-100	RACS-31-100	5/16	.3110	.3095	1.00	.375	.330	.91	.47	.23	.59	1.45	1.16
RAAS-31-125	RACH-31-125	RACS-31-125	5/16	.3110	.3095	1.25	.375	.330	.91	.47	.23	.59	1.45	1.16
RAAS-31-150	RACH-31-150	RACS-31-150	5/16	.3110	.3095	1.50	.375	.330	.91	.47	.23	.59	1.45	1.16
RAAS-31-175	RACH-31-175	RACS-31-175	5/16	.3110	.3095	1.75	.375	.330	.91	.47	.23	.59	1.45	1.16
RAAS-31-200	RACH-31-200	RACS-31-200	5/16	.3110	.3095	2.00	.375	.330	.91	.47	.23	.59	1.45	1.16
RAAS-31-250	RACH-31-250	RACS-31-250	5/16	.3110	.3095	2.50	.375	.330	.91	.47	.23	.59	1.45	1.16
RAAS-31-300	RACH-31-300	RACS-31-300	5/16	.3110	.3095	3.00	.375	.330	.91	.47	.23	.59	1.45	1.16
RAAS-31-350	RACH-31-350	RACS-31-350	5/16	.3110	.3095	3.50	.375	.330	.91	.47	.23	.59	1.45	1.16
RAAS-31-400	RACH-31-400	RACS-31-400	5/16	.3110	.3095	4.00	.375	.330	.91	.47	.23	.59	1.45	1.16
RAAS-37-050	RACH-37-050	RACS-37-050	3/8	.3735	.3720	.50	.440	.365	1.00	.56	.29	.65	1.52	1.16
RAAS-37-075	RACH-37-075	RACS-37-075	3/8	.3735	.3720	.75	.440	.365	1.00	.56	.29	.65	1.52	1.16
RAAS-37-100	RACH-37-100	RACS-37-100	3/8	.3735	.3720	1.00	.440	.365	1.00	.56	.29	.65	1.52	1.16
RAAS-37-125	RACH-37-125	RACS-37-125	3/8	.3735	.3720	1.25	.440	.365	1.00	.56	.29	.65	1.52	1.16
RAAS-37-150	RACH-37-150	RACS-37-150	3/8	.3735	.3720	1.50	.440	.365	1.00	.56	.29	.65	1.52	1.16
RAAS-37-175	RACH-37-175	RACS-37-175	3/8	.3735	.3720	1.75	.440	.365	1.00	.56	.29	.65	1.52	1.16
RAAS-37-200	RACH-37-200	RACS-37-200	3/8	.3735	.3720	2.00	.440	.365	1.00	.56	.29	.65	1.52	1.16
RAAS-37-250	RACH-37-250	RACS-37-250	3/8	.3735	.3720	2.50	.440	.365	1.00	.56	.29	.65	1.52	1.16
RAAS-37-300	RACH-37-300	RACS-37-300	3/8	.3735	.3720	3.00	.440	.365	1.00	.56	.29	.65	1.52	1.16
RAAS-37-350	RACH-37-350	RACS-37-350	3/8	.3735	.3720	3.50	.440	.365	1.00	.56	.29	.65	1.52	1.16
RAAS-37-400	RACH-37-400	RACS-37-400	3/8	.3735	.3720	4.00	.440	.365	1.00	.56	.29	.65	1.52	1.16
RAAS-50-100	RACH-50-100	RACS-50-100	1/2	.4985	.4970	1.00	.594	.460	1.27	.72	.42	.81	1.88	1.43
RAAS-50-125	RACH-50-125	RACS-50-125	1/2	.4985	.4970	1.25	.594	.460	1.27	.72	.42	.81	1.88	1.43
RAAS-50-150	RACH-50-150	RACS-50-150	1/2	.4985	.4970	1.50	.594	.460	1.27	.72	.42	.81	1.88	1.43
RAAS-50-175	RACH-50-175	RACS-50-175	1/2	.4985	.4970	1.75	.594	.460	1.27	.72	.42	.81	1.88	1.43
RAAS-50-200	RACH-50-200	RACS-50-200	1/2	.4985	.4970	2.00	.594	.460	1.27	.72	.42	.81	1.88	1.43
RAAS-50-250	RACH-50-250	RACS-50-250	1/2	.4985	.4970	2.50	.594	.460	1.27	.72	.42	.81	1.88	1.43
RAAS-50-300	RACH-50-300	RACS-50-300	1/2	.4985	.4970	3.00	.594	.460	1.27	.72	.42	.81	1.88	1.43
RAAS-50-350	RACH-50-350	RACS-50-350	1/2	.4985	.4970	3.50	.594	.460	1.27	.72	.42	.81	1.88	1.43
RAAS-50-400	RACH-50-400	RACS-50-400	1/2	.4985	.4970	4.00	.594	.460	1.27	.72	.42	.81	1.88	1.43
RAAS-50-450	RACH-50-450	RACS-50-450	1/2	.4985	.4970	4.50	.594	.460	1.27	.72	.42	.81	1.88	1.43
RAAS-50-500	RACH-50-500	RACS-50-500	1/2	.4985	.4970	5.00	.594	.460	1.27	.72	.42	.81	1.88	1.43
RAAS-50-550	RACH-50-550	RACS-50-550	1/2	.4985	.4970	5.50	.594	.460	1.27	.72	.42	.81	1.88	1.43
RAAS-50-600	RACH-50-600	RACS-50-600	1/2	.4985	.4970	6.00	.594	.460	1.27	.72	.42	.81	1.88	1.43